



WOLTMAN 55 DR

WOLTMAN PILING & DRILLING RIGS

Impressive torque, **Powerful pull**
Down, With tier IV engine, man
lift available, 250 kNm torque


DIESEKO GROUP

 **WOLTMAN**
PILING & DRILLING RIGS

WOLTMAN 55 DR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

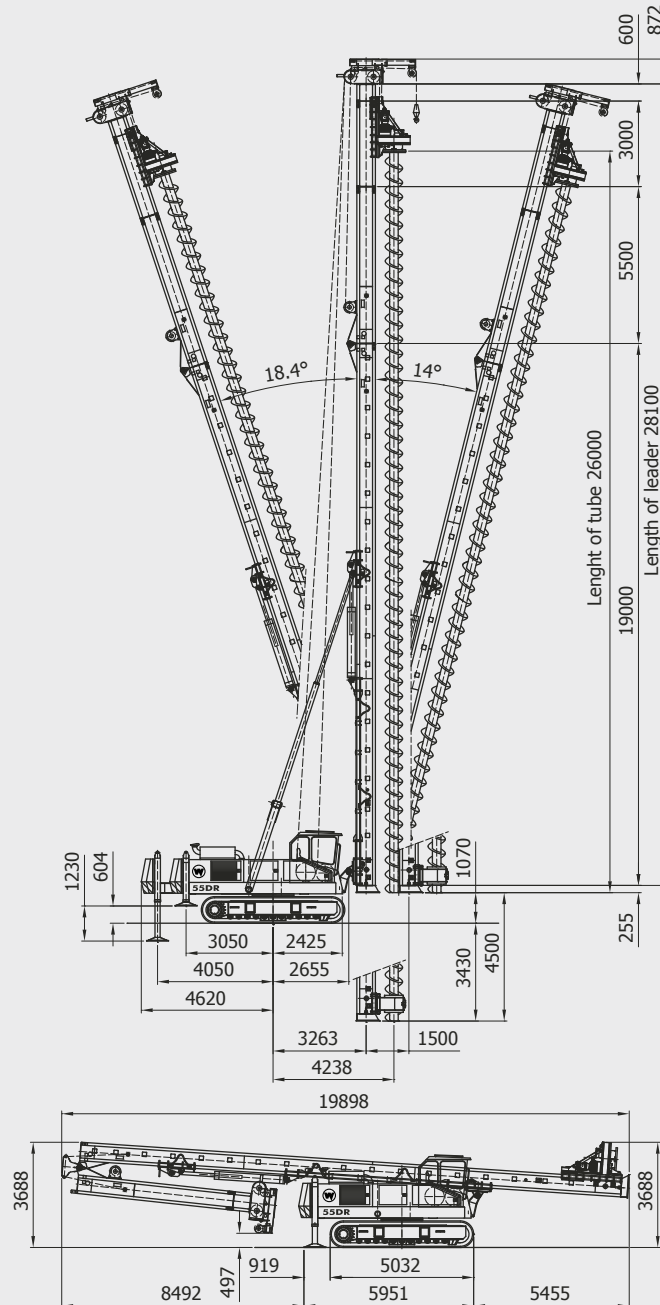

All dimensions are in millimeters

Operational specifications

Recommended Rotary head	PVE	RH-25		
Max. torque on leader	kNm	250	ton/m	28.1
Leader length std (max.)	mtr	24,8 (27,8)	ft	81.4 (91.2)
Max. drill depth	mtr	23 (26)	ft	75.5 (85.3)
Max. diameter	mm	1.000	inch	39
Pull up force	ton	50	lbs	110,231
Pull down force	ton	20	lbs	44,092
Operational weight RH-25	ton	63	lbs	138,891
Max. oil flow	ltr/min	520	g/min	137
Max. pressure	bar	320	psi	4,641

Weights

Transport weight	ton	57	lbs	125,663
Transport weight w/o counterweight	ton	53,2	lbs	117,286
Transport weight incl. RH-25	ton	63	lbs	138,891
Total counterweight	ton	6,9	lbs	15,212

Rig specifications

Engine	Caterpillar C-13			
Engine output	kW	350	HP	475
Hydraulics	Bosch Rexroth			
Hydraulic system	Openloop			

* subject to capacity charts

Woltman Piling and Drilling Rigs B.V. Everdenberg 17 4902 TT Oosterhout The Netherlands
T +31 (0)184 - 425 949 F +31 (0)184 - 424 820 I www.woltmanrigs.com E info@woltmanrigs.com

Member of
DIESEKO GROUP