




Specification Sheet

PVE 46M

Standard Frequency Vibratory Hammer

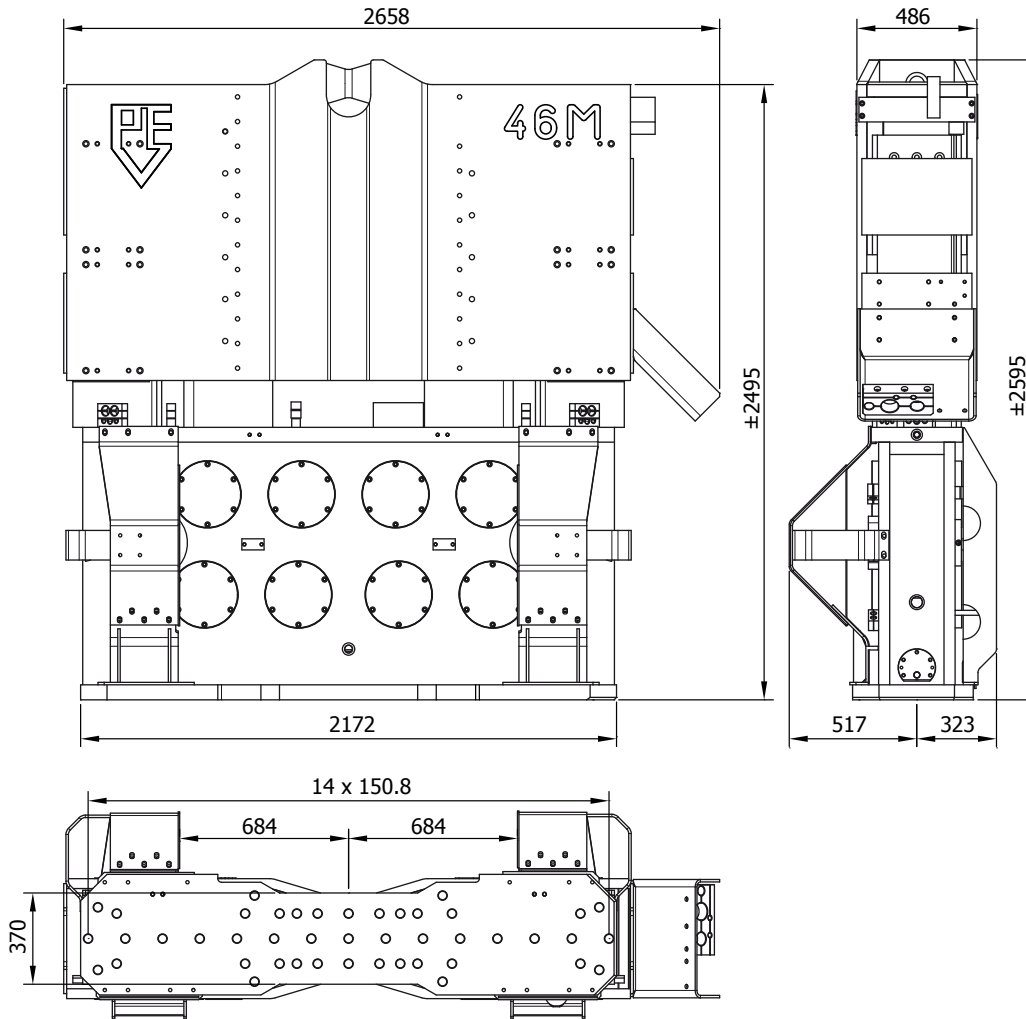

Dimensions in mm

Specifications

46M

Eccentric moment	3990	inch-lbs	Clamps:	
Max. centrifugal force	141	tons	Sheet pile clamp	DWK 160TU
Max. frequency	1570	rpm	Transport weight per piece	2425 lbs
Max. amplitude excluding DWK 160TU	9.17	inch	Double clamps	PPK 81TC
Max. amplitude including DWK 160TU	7.17	inch	Transport weight per piece	1058 lbs
Max. static line-pull	45	tons		
Max. operating pressure	5080	psi	Powerpack:	
Max. oil flow	161	gpm	Model	600
Forced lubrication	yes			
Dynamic weight excluding DWK 160TU	8710	lbs	Hose set:	
Dynamic weight including DWK 160TU	11130	lbs	Length	131 feet
Total weight excluding DWK 160TU & hoses	16420	lbs	Transport weight (±)	1863 lbs