




# Specification Sheet PVE 55M Standard Frequency Vibro Hammer

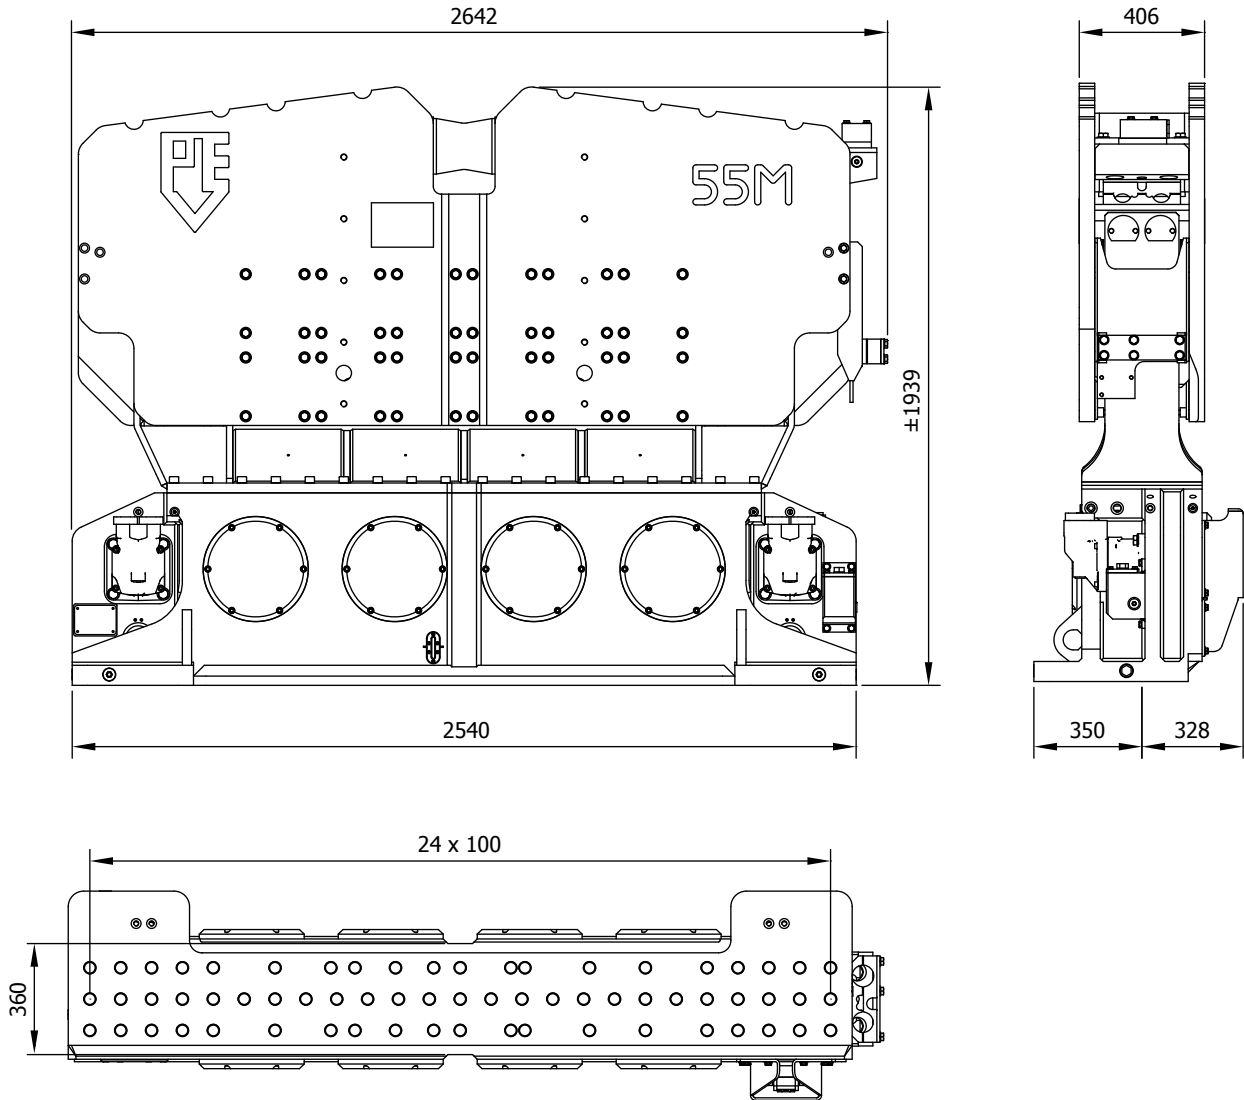

dimensions in mm

### Specifications

### 55M

Eccentric moment	4770 inch-lbs	<b>Clamps:</b>	
Max. centrifugal force	192 tons	Sheet pile clamp	DWK 200TU
Max. frequency	1700 rpm	Transport weight per piece	2866 lbs
Max. amplitude excluding DWK 200TU	1.18 inch	Double clamps	PPK 100T
Max. amplitude including DWK 200TU	0.87 inch	Transport weight per piece	1521 lbs
Max. static line-pull	90 tons	<b>Powerpack:</b>	
Max. operating pressure	5080 psi	Model	600
Max. oil flow	163 gpm	<b>Hose set:</b>	
Forced lubrication	yes	Length	148 feet
Dynamic weight excluding DWK 200TU	7890 lbs	Transport weight (±)	2425 lbs
Dynamic weight including DWK 200TU	10760 lbs		
Total weight excluding DWK 200TU & hoses	12570 lbs		