
Specification Sheet **PVE 170M**

Standard Frequency Vibro Hammer

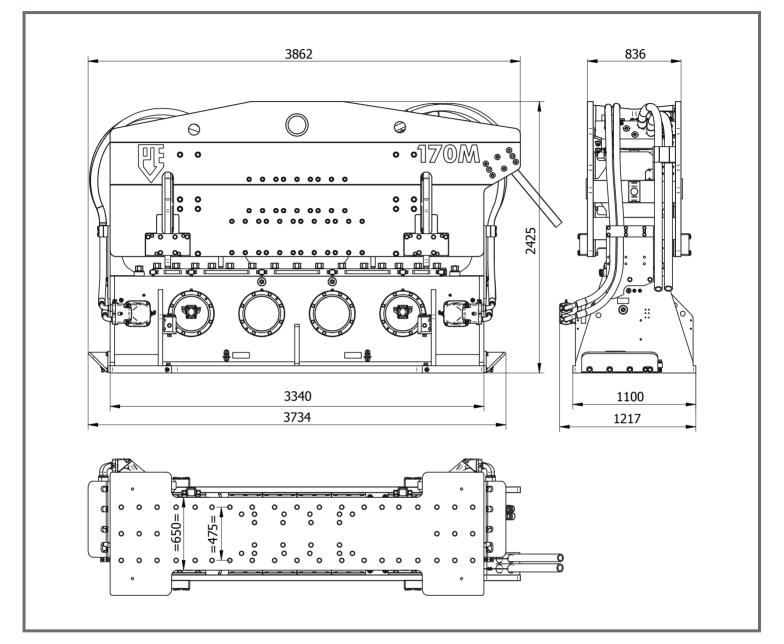

| Specifications | 170M | | | | |
|---|-------|----------|----------------------------|----------|------|
| Eccentric moment | 14760 | inch-lbs | Clamps: | | |
| Max. centrifugal force | 411 | tons | Double clamps | PPK 350T | 2x |
| Max. frequency | 1400 | rpm | Transport weight per piece | 6570 | lbs |
| Max. amplitude excluding PPK 350T | 1.27 | inch | | | |
| Max. amplitude including PPK 350T | 0.81 | inch | | | |
| Max. static line-pull | 142 | tons | | | |
| Max. operating pressure | 5080 | psi | Powerpack: | | |
| Max. oil flow | 342 | gpm | Model | 1400 | |
| Forced lubrication | yes | | | | |
| Dynamic weight excluding PPK 350T | 23270 | lbs | Hose set: | | |
| Dynamic weight including PPK 350T | 36410 | lbs | Length | 148 | feet |
| Total weight excluding PPK 350T & hoses | 37590 | lbs | Transport weight (±) | 2712 | lbs |