




# Specification Sheet PVE 200M Standard Frequency Vibro Hammer

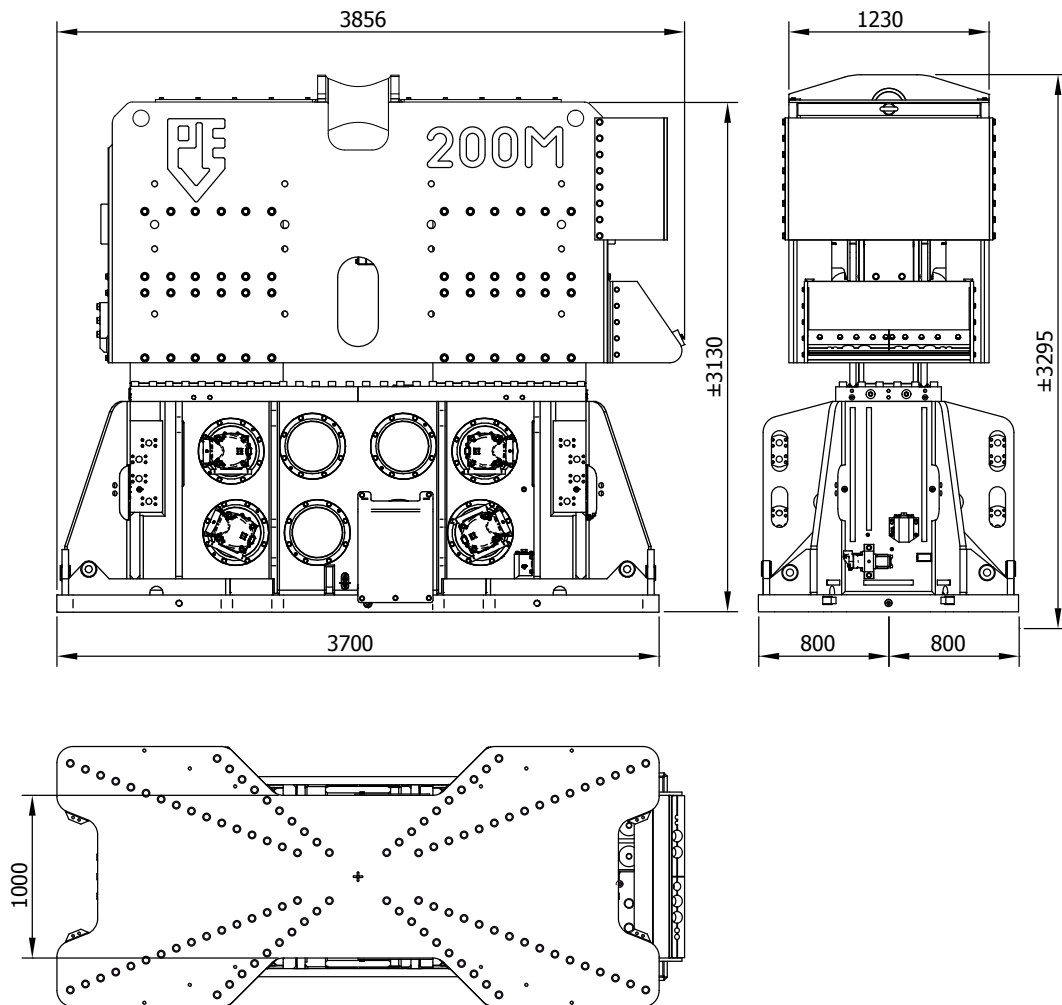

## Specifications

### 200M

|                                         |                |                            |             |
|-----------------------------------------|----------------|----------------------------|-------------|
| Eccentric moment                        | 17360 inch-lbs | <b>Clamps:</b>             |             |
| Max. centrifugal force                  | 483 tons       | Double clamps              | PPK 150T 4x |
| Max. frequency                          | 1400 rpm       | Transport weight per piece | 2866 lbs    |
| Max. amplitude excluding PPK 150T       | 0.75 inch      |                            |             |
| Max. amplitude including PPK 150T       | 0.6 inch       |                            |             |
| Max. static line-pull                   | 225 tons       |                            |             |
| Max. operating pressure                 | 5080 psi       | <b>Powerpack:</b>          |             |
| Max. oil flow                           | 444 gpm        | Model                      | 1600        |
| Forced lubrication                      | yes            |                            |             |
| Dynamic weight excluding PPK 150T       | 46300 lbs      | <b>Hose set:</b>           |             |
| Dynamic weight including PPK 150T       | 57760 lbs      | Length                     | 148 feet    |
| Total weight excluding PPK 150T & hoses | 63930 lbs      | Transport weight (±)       | 2712 lbs    |