




Specification Sheet

PVE 250M

Standard Frequency Vibro Hammer

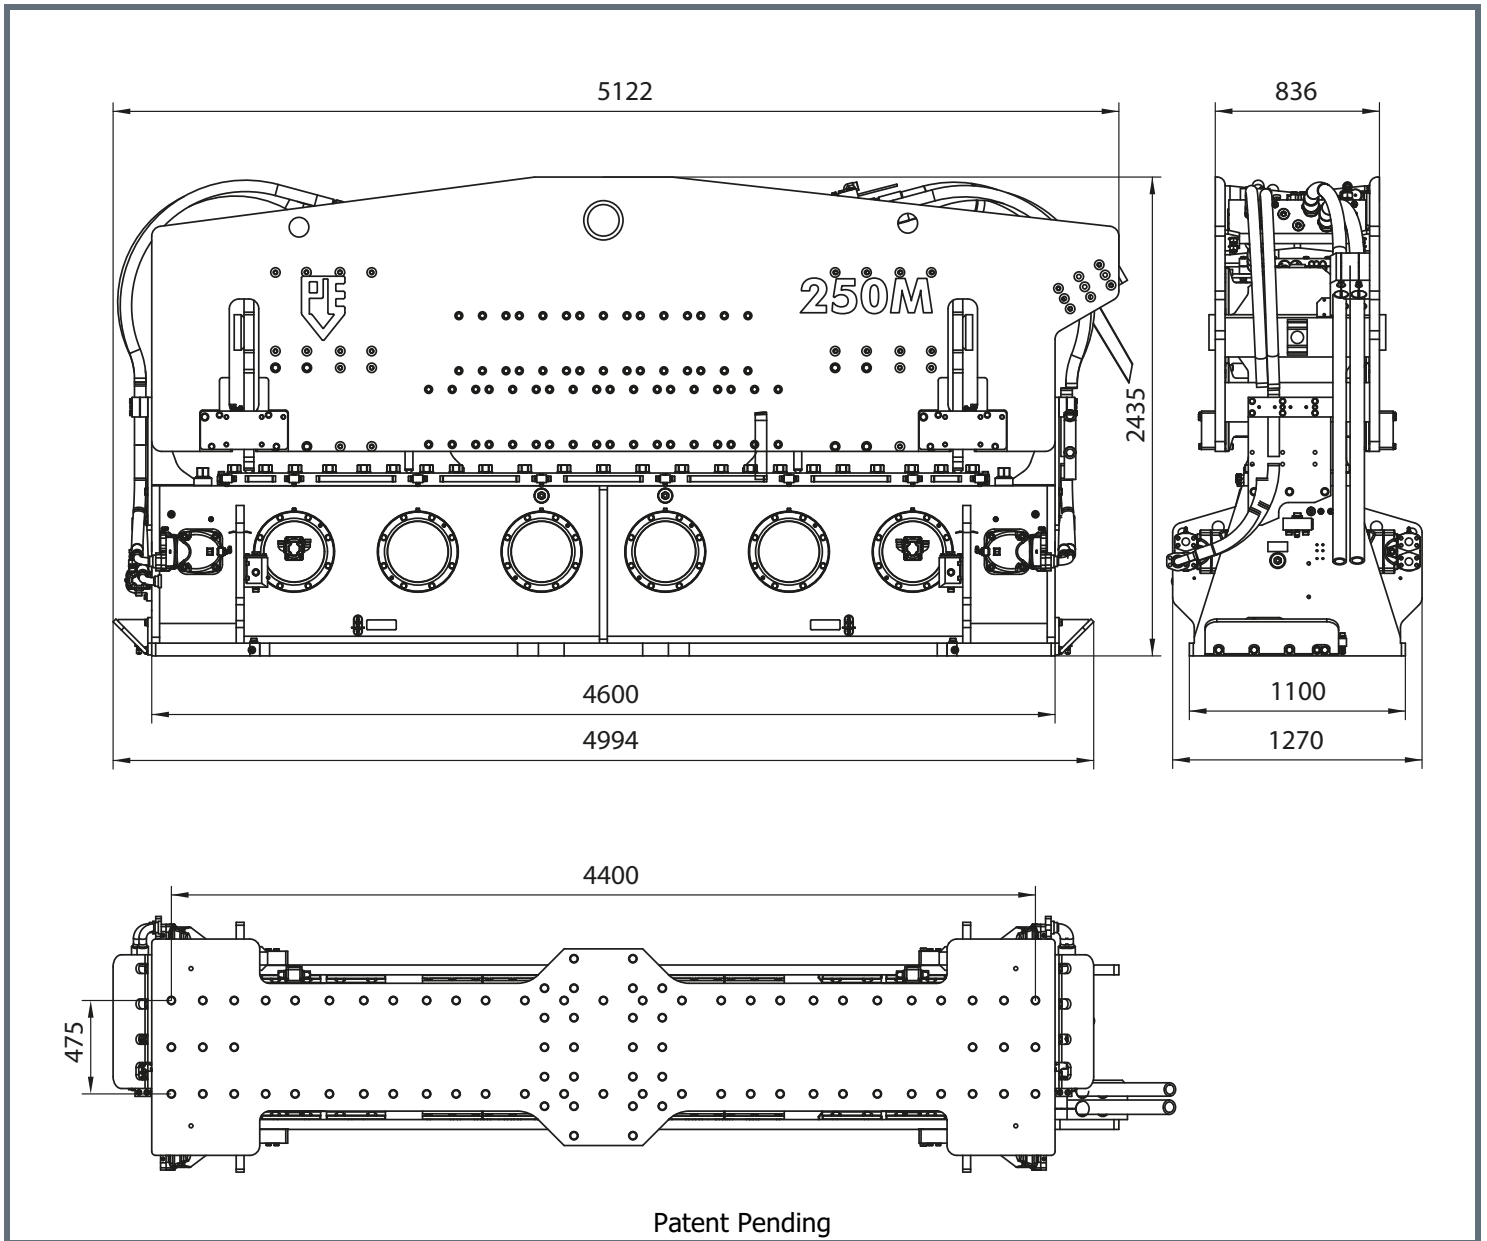

Patent Pending

Specifications

250M

Eccentric moment	21700	inch-lbs	Clamps:	
Max. centrifugal force	604	tons	Double clamps	PPK 350T 2x
Max. frequency	1400	rpm	Transport weight per piece	6570 lbs
Max. amplitude excluding PPK 350T	1.24	inch		
Max. amplitude including PPK 350T	0.91	inch		
Max. static line-pull	255	tons		
Max. operating pressure	5080	psi	Powerpack:	
Max. oil flow	423	gpm	Model	1600
Forced lubrication	yes			
Dynamic weight excluding PPK 350T	34880	lbs	Hose set:	
Dynamic weight including PPK 350T	48020	lbs	Length	on request feet
Total weight excluding PPK 350T & hoses	55670	lbs	Transport weight (±)	lbs